NetReach™ XC LC Swing-Out Series

Integrated Cross Connect Solution

EMERSON™
Network Power

Key Features

- 50-pair RLS50 terminal blocks provide rapid pair-at-a-time no-strip jumpering
- Dual “toolbox” latches on doors provide door alignment and security
- May be pad or stake-mounted to accommodate all mounting requirements
- Rugged metal housing for durability and low maintenance costs
- Treated with a powder-coat paint process on the interior and exterior for extended life

The NetReach™ XC LC Swing-Out Series from Emerson is an economical integrated solution for low pair-count applications.

These single-access interface cabinets, formerly known as the ERLS/ECQF Series, accommodate 100 to 900 pair using 50-pair RLS50 blocks and provide rapid pair-at-a-time no-strip jumpering.

The metal enclosure is powder-coated with a gray-green or off-white paint finish and equipped with a hinged-grill, test cord, wire spool, two stakes and recessed pad-mounting BA12 brackets. Security latches are accessed using a 216-type tool.

The LC Swing-Out Series can be flush mounted to the pad with the PADMT200300 kit, which includes two brackets that can be attached either inside or outside of the base. This kit must be ordered separately.

Application

The NetReach™ XC LC Swing-Out Series is an above-ground line of outdoor cabinets used in pad or stake-mounted applications. The cabinet provides convenient pair-at-a-time connections, and accommodates RSL50 terminal blocks.

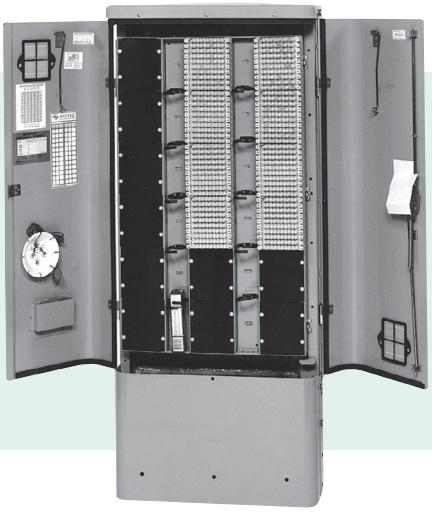

NetReach™ XC LC Swing-Out Series
shown with 400 pair of RLS50 blocks

EMERSON
Network Power

Dimensions

Cabinet Size	H	W	D
100-900 pair	56.50-in.	23.75-in.	11.30-in.

NOTE: Base is 14-in. tall.

Ordering Information

Catalog Number	Part Number	Description	In	Out
FSERLS200	F010559	200-pair installed, RLS block	100	100
FSERLS400	F010561	400-pair installed, RLS block	200	200
FSERLS600	F010543	600-pair installed, RLS block	300	300
FSERLS900	F957241	900-pair installed, RLS block	300	600
FSE900	F016934	Empty cabinet, hinged grill, no blocks, tester dish without tester		
FSERLS200CF	F1002323	200-pair installed, RLS50 block with 710 CF connector	100	100
FSERLS200DPM	F010533	200-pair installed, RLS50 block with 3M® 4005-DPM connectors	100	100
FSEFLS400CF	F010541	400-pair installed, RLS50 block with 710 CF connector	200	200
FSERLS400DPM	F010539	400-pair installed, RLS50 block with 3M® 4005-DPM connectors	200	200
FSERLS600CF	F1002324	600-pair installed, RLS50 block with 710 CF connector	300	300
FSERLS60DPM	F010534	600-pair installed, RLS50 block with 3M® 4005-DPM connectors	300	300
FSERLS900CF	F010536	900-pair installed, RLS50 block with 710 CF connector	300	600
FSERLS900DPM	F010538	900-pair installed, RLS50 block with 3M® 4005-DPM connectors	300	600

NOTE 1: Cabinet is expandable to 900-pair.

NOTE 2: Terminal blocks can also be equipped with filled bridge connectors, 4005-GBM.

EmersonNetworkPower.com

EmersonNetworkPower.com/EnergySystems (North America)

© Emerson Network Power, Energy Systems, North America, Inc. 2014.

Business-Critical Continuity™, Emerson Network Power™, the Emerson Network Power logo, Emerson™ and Consider it Solved are service marks and trademarks of Emerson Electric Co. EnergyMaster™, eSure™, NetPerform™, NetReach™, NetSpan™, NetSure™ and NetXtend™ are trademarks of Emerson Network Power, Energy Systems, North America, Inc. Any other product, brand, or company names or logos are the property of the respective owner.

010300B-NRXCLC / 1214

While every precaution has been taken to ensure accuracy and completeness herein, Emerson Electric Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications subject to change without notice.

EMERSON. CONSIDER IT SOLVED™